



TOTAL AUTOMOTIVE
LIFTING SOLUTIONS INC.

VEGA LIFT
VEGA240/340/450 SERIES

HEAVY DUTY BUS, TRUCK & OFF ROAD LIFTING

DRIVE ON RAMP STYLE PARALLELOGRAM LIFTS PROVIDE RAPID ACCESS FOR INSPECTION, SERVICE OR WASH BAY OPERATIONS

VEGA

50,000 LB. (24T) TO 99,000 LB. (45T) LIFTING CAPACITY

RUNWAYS 26' (8M) TO 50' (15.2M) / CONTINUOUS BASE OR OPEN FLOOR, POWDER COAT OR HOT DIP GALVANIZED



ADDITIONAL FEATURES



Exclusive "Torsion Bar" control eliminates the need for electronic sensors - Stays level all the time.



Optional Washbay with G9 Hot Dip Galvanizing & Stainless Steel hardware



Articulating bus model with 10 lifting legs and a 50' /15.2M long runway

TOTAL AUTOMOTIVE LIFTING SOLUTIONS INC. 2300 SPEERS RD OAKVILLE, ON L6L 2X8 PHONE (877) 799-5438 FAX (905) 891-1214

JUNE 2017



VEGA PARALLELOGRAM

50,000 LB. / 24T TO 99,000 LB. (45T)

VEGA 240, 340 & 450 SERIES

AT TLS OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE

VEGA MODEL	CAPACITY	POWER SUPPLY	LENGTH	RUNWAY SPACING	RUNWAY WIDTH	COLLAPSED HEIGHT	RAISED HEIGHT	APPROACH RAMP LENGTH	LIFT TIME	SHIP WEIGHT
Vega 240	50,000 lb./ 24ton	14.8HP / 11kw - 208/440v 3 phase 60hz optional. 600v	26', 28', 32', 35', 48' / 8M, 8.5M 9.8M, 10.6M 14.5M	41" / 1041mm or optional 45" / 1143mm	30" / 762mm, optional 32" / 813mm	13.6" / 345mm	73" / 1854mm optional 77" / 1956mm	104" / 2642mm	75	10 to 15,000 lbs. / 4.5T to 6.8T
Vega 340	75,000 lb/ 34ton.	23.5HP/ 17.5kw 208/440v 3 phase 60hz optional. 600v	30', 50' / 9M, 15.2M	41" / 1041mm or optional 45" / 1143mm	30" / 762mm, optional 32" / 813mm	13.6" / 345mm	73" / 1854mm optional 77" / 1956mm	104" / 2642mm	75	13 to 17,000 lbs. / 5.9T to 7.7T
Vega 450	99,000 lb./45ton	23.5HP/ 17.5kw 208/440v 3 phase 60hz optional. 600v	32' or 48' / 9.8M or 14.5M	41" / 1041mm or optional 45" / 1143mm	30" / 762mm, optional 32" / 813mm	13.6" / 345mm	73" / 1854mm optional 77" / 1956mm	104" / 2642mm	75	15 to 19,000 lbs. / 6.8T to 8.6T

FEATURES

- **Built to higher quality standard;** made in Italy by O.M.E.R S.p.A, a world leader in Heavy Duty lifts for over 20 years in an ISO 9001 facility
- **Improved worker productivity** - maximum clear floor with no obstructions front or rear. Extended lifting height of 73" or 77" / 1854mm or 1956mm.
- **Greater flexibility** - choose from 50,000 lb. to 99,000 lb. / 24T to 45T capacities with runways 26' (8M) to 50' (15.2M). Install as surface mounted, recessed floor or full flush mount.
- **Premium options and accessories can expand the capabilities & productivity** - wide range of accessories include HD jacking beams, runways traction surface, LED lighting, runway foot shutoff guards built in runway air, wash bay rough surface protection.
- **Lower maintenance costs** - choice of premium double bake powder coat or optional G9 Hot Dip Galvanizing. Stainless steel hinge pins with zirk style grease fittings. Cylinders mounted on upper leg and protected by runways from water and dirt.
- **Precision levelling & control** - exclusive "Torsion Bar" mechanical/ hydraulic control maintains perfect level within 1/4" / 6.4mm without electronic sensors mounted on the lift or fault codes.
- **Custom engineering and design available** - Omer has extensive design and engineering resources capable of creating the right lifting solution for virtually every application and lifting capacity for highway or off road applications.
- **Structural strength provides greater stability and extends the projected life cycle of the lift.** Omer Vega lifts out weigh some major competitors by as much as 40%.
- **Lifts more weight, Lifts Higher and lifts Faster than all competitive vertical rise lifts.** The Vega lift rises 73" / 1854mm in 75 seconds.

OPTIONAL ACCESSORY



Optional Shatterproof Fluorescent or LED 24v Runway lighting



26,400 lb. (12T), 35,200 lb. (16T) & 44,000 lb. (20T) air hydraulic heavy duty jacking beams




Nema 4 water resistant stainless steel control console



Silica based anti slip runway traction surface

EQUIPMENT FOOTPRINT

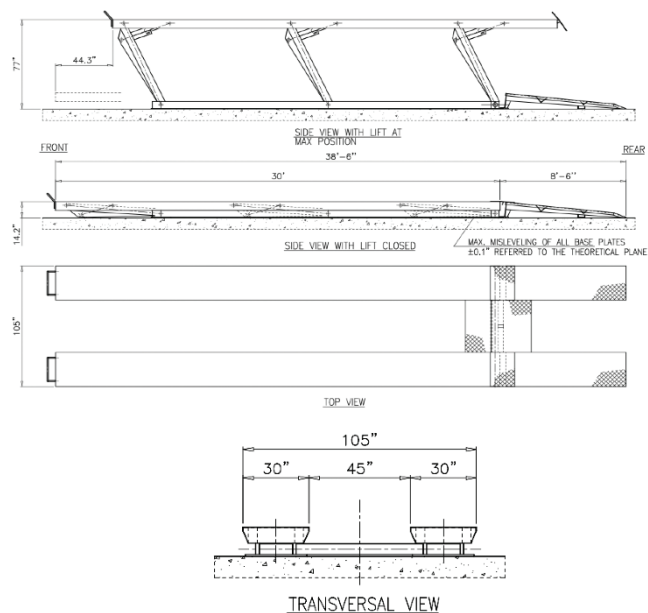

CONTACT US NOW

WWW.TSLIFTS.COM OR CALL (877) 799-5438

