

TCO
TOTAL
COST OF
OWNERSHIP



Call: 866-799-lift

HEAVY DUTY TRUCK 4 POST LIFTS WITH EXTENDED RUNWAYS



EV CAR SERVICE

HEAVY DUTY CLOSED FRONT 4 POST ALIGNMENT OR SERVICE


30,000 OR 33,000 LB. / 13.6T
OR 15T CAPACITY

PREMIUM 5/8" (15.9MM) CABLES / 13" (330MM)
MACHINED STEEL PULLEYS

RUNWAYS LIFT HIGHER 70 1/4" (1784MM) &
COLLAPSE LOWER 10" (254MM)




TLS430FDCx1
TLS433FDCX1




THREE RUNWAY LENGTHS TO CHOOSE FROM -
21 3/4', 24 3/4' OR 27 3/4' / 6.6M, 7.5M OR 8.5M

OPTIONAL ACCESSORIES

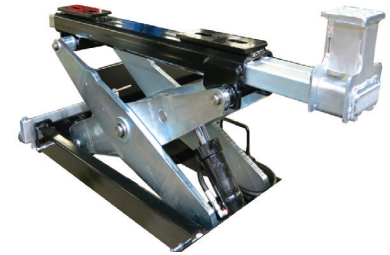


Heavy duty 15,000 lb. (6.8T) Jacking
beam TLS-RJ15 1yr. parts warranty

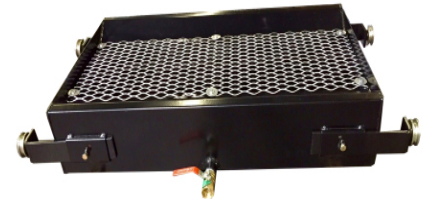

Waste Oil Drain Tray TLSWOD



Built in runway tire inflation
hoses with pressure gauges
#TLSTIL

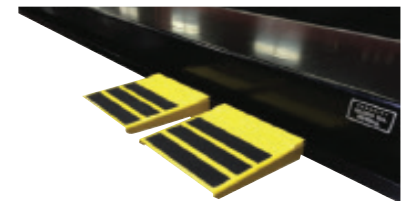

Removeable Runway Step
Platforms with non slip
surface #TLSMWS

CONTACT US NOW

Call: 866-799-5438
www.tslifts.com



Total automotive lifting solutions
Retail locations throughout Canada
2300 Speers Rd Oakville Ontario



Authorized TLS distributors located: Alabama, Arizona, Cali-
fornia, Florida, Texas, Indiana, New England, New Hampshire,
Wisconsin, Missouri, & Virginia



HEAVY DUTY


4 POST flat deck service lift
30 OR 33,000 LB./ 13.6T OR 15T CAPACITY

STANDARD TLS430FDCRx1 / TLS433FDCRx1
EXTENDED TLS430FDCXx1 / TLS433FDCXx1
EXTRA LONG TLS430FDCEx1 / TLS433FD-


AT TLS WE BUILD LIFTS THAT LAST LONGER, PERFORM BETTER & COST LESS TO OPERATE



1. Machined 13" / 330mm Pulley & 5/8" / 15.9 mm 6 x 36 cables




2. Double wall reinforced deck with Z rail



3. 4" x 8 1/4" x 3/8" / 102 x 213x 9.5 mm HD front & rear traverse beams



6. Air locking system with water trap/regulator filter standard

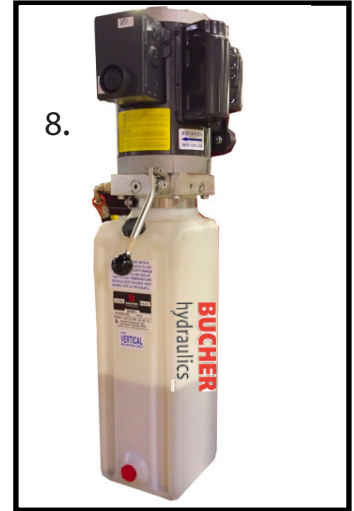


8.

Energy efficient premium US Made Bucher 4HP / 3 kw power unit typically lasts the life of the lift - single point lock release


	FEATURE
1.	13" / 330mm steel pulleys with 5/8" / 15.9mm cables
2.	Wide 26" / 660 mm double wall non flex runways
3	Durable powder coat double bake finish
4	3" x 8 1/4" x 1/4" / 72 x 210x 6.4mm traverse beams
5	Internal Krown rustproofing
6	Water trap/ air regulator/ filter
7	Single point air lock releases
8	Premium US made Bucher Power Unit
9.	open runways with 7/8" / 875mm plated rollers balls
	Three (3) deck lengths to choose from
	5" Diameter x 69" long / 127 x 1753 mm cylinder

	BENEFITS
1.	Last longer with less maintenance
2.	More stable platform for light & medium duty trucks
3	Resists corrosion reduces & maintenance costs Re
4	Creates a stronger more stable lift platform
5	Prevents structural corrosion damage
6	lower maintenance cost for locks & jacks
7	Safer raising and lowering on the locks
8	energy efficient & Lasts longer
	Lasts longer with Less maintenance
	Provides greater flexibility with type of vehicles
	Lasts longer with Less maintenance



Unique cable routing uses a maximum of two pulleys stacked together with a trunion "non Rotation bar" that creates long cable & pulley lift

EQUIPMENT FOOTPRINT

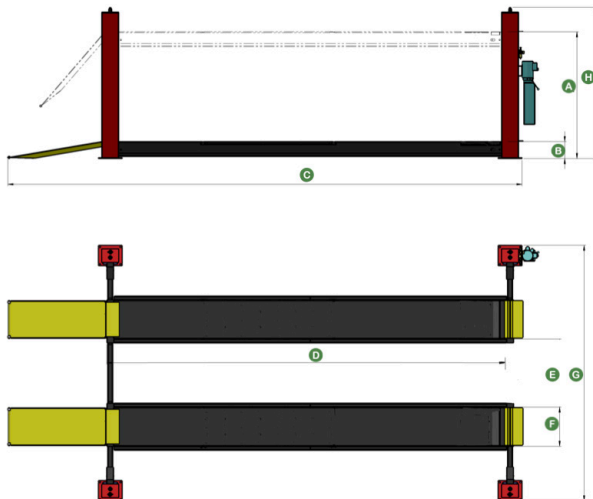

Disclaimer: TLS Inc. is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.

CATEGORY		30,000 lb. (13.6T)	33,000 lb. (15T)
	CAPACITY	30,000 lb. (13.6T)	33,000 lb. (15T)
	OPEN OR CLOSED FRONT	Closed Front	
A	RAISED HEIGHT	70 1/4" (1784mm)	
B	LOWERED HEIGHT	10" (254mm)	
C	OVERALL LENGTH EX LONG	400 1/4" (10166mm)	
C	OVERALL LENGTH EXTENDED	364 1/4" (9252mm)	
C	OVERALL LENGTH STANDARD	328 1/4" (8338mm)	
D	DECK LENGTH EX LONG	333" (8458mm)	
D	DECK LENGTH EXTENDED	297" (7544mm)	
D	DECK LENGTH STANDARD	261" (6629mm)	
E	WIDTH BETWEEN RUNWAYS	42" to 48" (1067mm to 1219mm)	
F	RUNWAY DECK WIDTH	26" (660mm)	
G	OVERALL WIDTH FRONT/REAR	150" (3810mm)	
H	MAX COLUMN HEIGHT	92 1/2" (2350mm)	
	MAX WHEEL BASE STANDARD	241" (6121mm)	
	MAX WHEEL BASE EXTENDED	277" (7036mm)	
	MAX WHEEL BASE EX LONG	313" (7950mm)	
	LIFT TIME	100 seconds	
	POWER REQUIREMENTS	230V - 60Hz - 1Ph - 20 amp	
	JACKING BEAM CAPACITY	15,000 LB. (6.8T)	
	SHIPPING WEIGHTS	5600 - 6500 lb. (2546 - 2955 kg)	5800 - 6700 lb. (2636 - 3045 kg)

CONTACT US NOW

Call: 866-799-5438
www.tslifts.com



Total automotive lifting solutions
Retail locations throughout Canada
2300 Speers Rd Oakville Ontario



Authorized TLS distributors located: Alabama, Arizona, California, Florida, Texas, Indiana, New England, New Hampshire, Wisconsin, Missouri, & Virginia