

TCO
TOTAL
COST OF
OWNERSHIP



CALL: 877-799-LIFT

FULL RISE DOUBLE SCISSOR FRAME ENGAGING LIFT

DUAL SCISSOR

10,000 LB. / 4.5 CAPACITY

COMPACT DESIGN WITH OVERALL WIDTH OF 81" / 2057MM RAISED HEIGHT OF 79" / 2007MM



#TLSS10LP1



**OPTIONAL ADJUSTABLE
 FRAME ENGAGING TRUCK
 ADAPTER WITH ADJUSTABLE
 DOUBLE SCREW LIFT PAD
 #TLSS10LP-TBA4**

FEATURES



VOLUMETRIC CONTROL



RETRACTABLE PULL DECKS 82.7" / 2100MM



FLUSH OR SURFACE MOUNTED

CONTACT US NOW

CALL: 866-799-5438
WWW.TLSLIFTS.COM



TOTAL AUTOMOTIVE LIFTING SOLUTIONS
 RETAIL LOCATIONS THROUGHOUT CANADA
 2300 SPEERS RD OAKVILLE ONTARIO



TLS DISTRIBUTORS LOCATED: ALABAMA, ARIZONA, CALI-FORNIA, FLORIDA, TEXAS, INDIANA, NEW ENGLAND, NEW HAMPSHIRE, WISCONSIN, MISSOURI, & VIRGINIA

DUAL SCISSOR 10,000 LB. / 4.5 CAPACITY

SERVICE TLSS10LP1

AT TLS OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE

SPECIFICATIONS	
CAPACITY	10,000 LBS. / 4.5T
OVERALL LENGTH - SURFACE MOUNT	160" / 4064MM
OVERALL LENGTH - FLUSH MOUNT	60" / 1524MM
OVERALL WIDTH	81.9" / 2080MM
WIDTH BETWEEN RUNWAYS	34.3" / 870MM
DECK WIDTH	23.8" / 605MM
LOWERED HEIGHT	8.3" / 211MM
RAISED HEIGHT	79.5" / 2019MM
LIFTING TIME	45 SECONDS
POWER REQUIREMENTS	230 VOLTS - 60 HZ - 1 PH - 20AMP
SHIPPING WEIGHT	2,850 LBS. / 1.3T
PART NUMBER	TLSS10LP1


OPTIONAL FEATURES

DRIVE ON BACK OFF OR DRIVE THROUGH OPTION




ROUGH SERVICE USE
OPTIONAL HOT DIPPED GALVANIZED BASE FRAME PREVENTS CORROSION

HIGH VOLUME USE
OPTIONAL CHROME PLATED HINGE PINS WITH EXTERNAL GREASE FITTINGS.



Disclaimer: TLS Inc. is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.

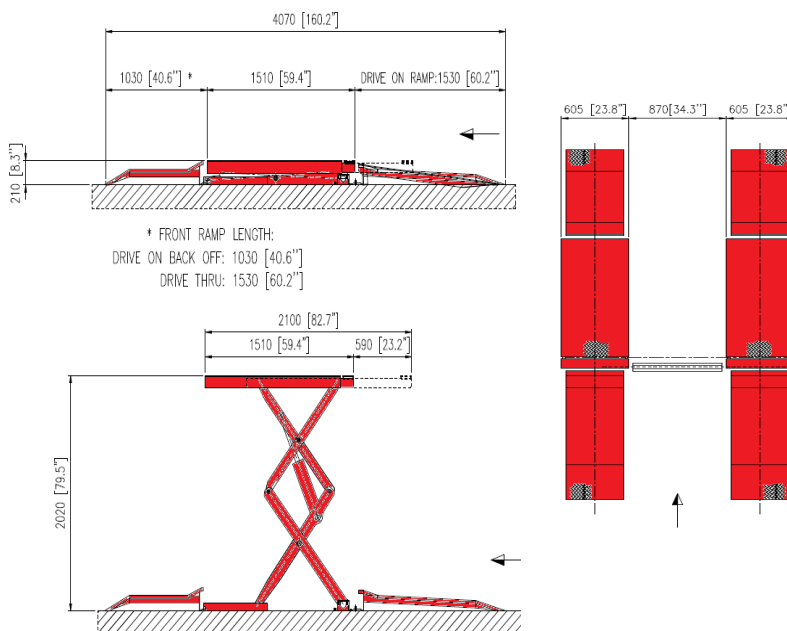

FEATURES

- COMPACT DESIGN - RUGGED CONSTRUCTION - SMALL FOOT PRINT TAKES UP LESS BAY SPACE WHILE STILL ALLOWING BEST IN CLASS WEIGHT CAPACITIES.
- VERSATILITY AND EASE OF USE - IDEAL FOR SMALL COMPACT CARS UP TO LIGHT DUTY TRUCKS WITH PULL OUT EXTENSIONS ALLOWING EASE OF USE ON SHORT OR LONG WHEELBASE VEHICLES.
- VOLUMERIC CONTROL STAYS LEVEL ALL THE TIME - THANKS TO SINGLE CYLINDER WITH DUAL CHAMBER, UNIT STAYS LEVEL ALL THE TIME.
- LOWER MAINTINANCE - LESS DOWNTIME - NO ELECTRONIC SENSORS, NO EQUALIZATION VALVE, EXTRA-LARGE PINS WITH ACCESSIBLE GREASE FITTINGS MAKES THIS IDEAL EQUIPMENT FOR HIGH DUTY CYCLE SHOPS WHO REQUIRE LESS DOWNTIME.
- BUILT FOR SAFETY - 21 LOCKING POSITIONS ENSURE SIDE TO SIDE STABILITY AND ELIMINATES ACCIDENTAL LOWERING OF THE LIFT.
- UNOBSTRUCTED ACCESS - OPEN FRONT AND REAR CONSTRUCTION WITH NO TIRE BARS OR TORSION RODS ALLOWS FOR UNOBSTRUCTED ACCESS TO THE UNDERSIDE OF MOST VEHICLES WITH 34 1/4" / 870MM OF WORKING AREA BETWEEN THE SUPERSTRUCTURES.
- EASY VEHICLE SPOTTING - THE FLAT DECK PLATFORM AND "SPOTTING BLOCKS" ALLOWS QUICK SET-UP BY THE OPERATOR INCREASING BAY PRODUCTIVITY.
- LOW PROFILE APPROACH RAMP OR FLUSH MOUNT OPTIONS - THE LOW PROFILE RAMP EXTENSIONS ALLOW FOR ACCESSIBILITY OF SMALLER COMPACT CARS WHILE STILL ALLOWING FOR HEAVIER LOADS. THE LIFT CAN ALSO BE FLUSH MOUNTED FOR THE ULTIMATE PRODUCTIVITY AND SPACE SAVING BAY SOLUTIONS.

CONTACT US NOW

CALL: 866-799-5438
WWW.TLSLIFTS.COM

TOTAL AUTOMOTIVE LIFTING SOLUTIONS
RETAIL LOCATIONS THROUGHOUT CANADA
2300 SPEERS RD OAKVILLE ONTARIO

TLS DISTRIBUTORS LOCATED: ALABAMA, ARIZONA, CALIFORNIA, FLORIDA, TEXAS, INDIANA, NEW ENGLAND, NEW HAMPSHIRE, WISCONSIN, MISSOURI, & VIRGINIA